




Deluxe Double Swing Using Instructions

CHAIN SET

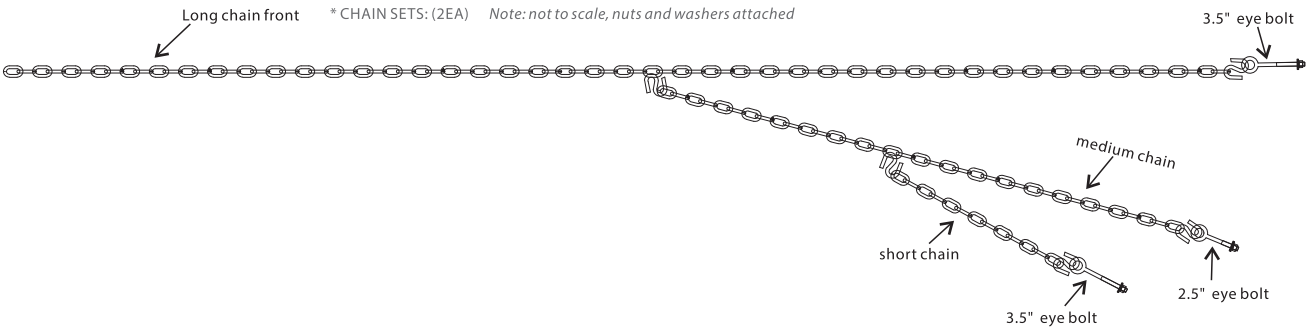


HARDWARE PACK

- | | | | | | | | | |
|----|--|-------------------------|---|--|------------------------|---|--|------------------|
| 1a | | 1.75" hex bolts (4EA) | 3 | | 3/4" barrel nuts (4EA) | 6 | | tree hooks (2EA) |
| 1b | | 2.5" hex bolts (2EA) | 4 | | 1/4" washers (12EA) | 7 | | hex key (1EA) |
| 1c | | 3.5" hex bolts (2EA) | 5 | | 1/4" lock nuts (4EA) | | | |
| 2 | | 2.5" barrel bolts (4EA) | | | | | | |

CHAIR PARTS

- .left arm
- .right arm
- .center table support
- .table
- .lower rope seat support
- .outside verticals (2EA)
- .middle vertical
- .upper seat support
- .upper support
- .lower support

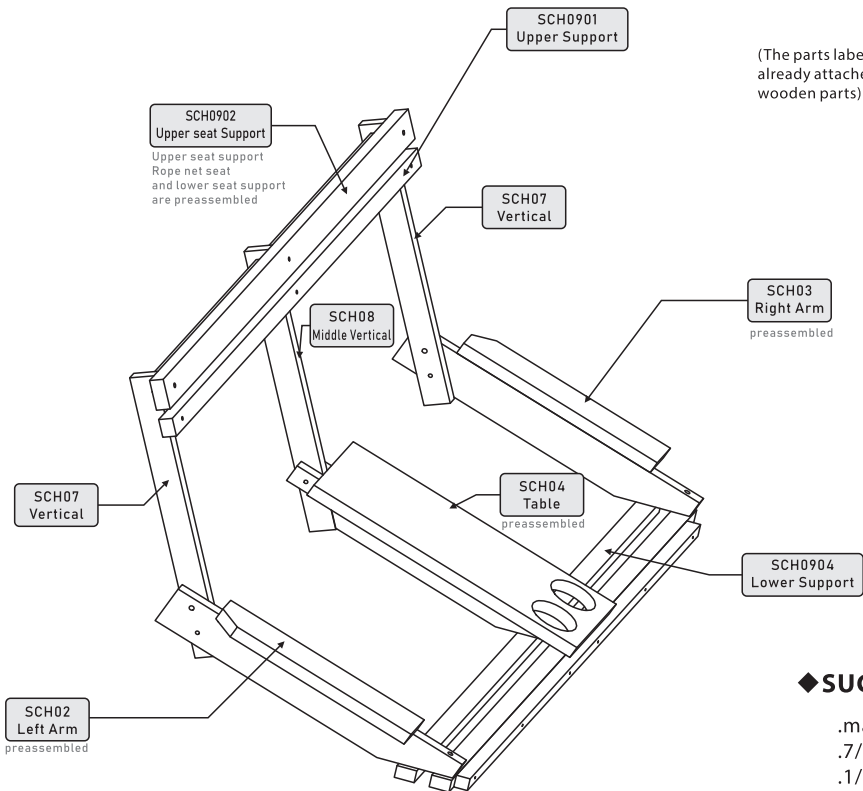


SUGGESTED TOOLS

- .mallet
- .7/16" wrench
- .1/2" wrench
- .flat head screwdriver


◆ASSEMBLY

[STEP 1]: Use (3) 1.75" hex bolts and (3) washers to attach left arm, right arm, and center table support to lower support.

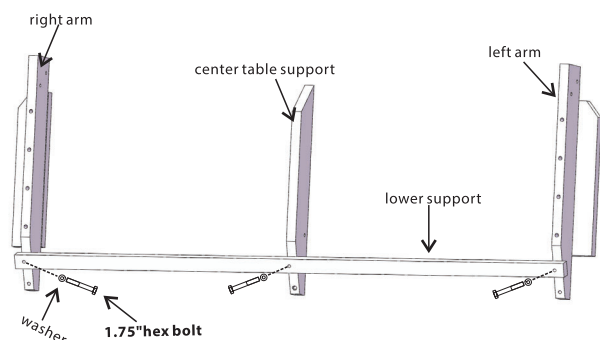


[STEP 2]: Use (2) 2.5" hex bolts, (4) washers, and (2) lock nuts to attach (2) outside verticals to left and right arm. Use (2) 3.5" hex bolts, (4) washers, and (2) lock nuts to attach table and middle vertical to center table support.


***Note: DO NOT** tighten bolts until STEP4.

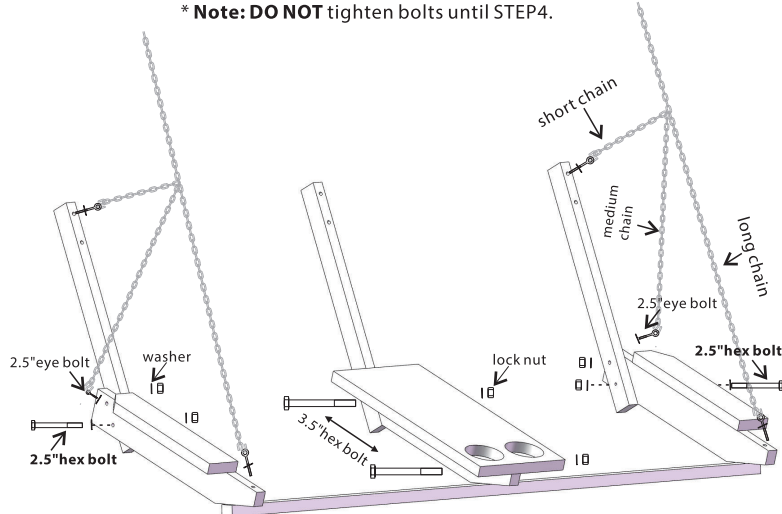

[STEP 3]: Use (3) 2.5" barrel bolts and (3) barrel nuts to attach upper support to verticals. (rope nets not pictured)

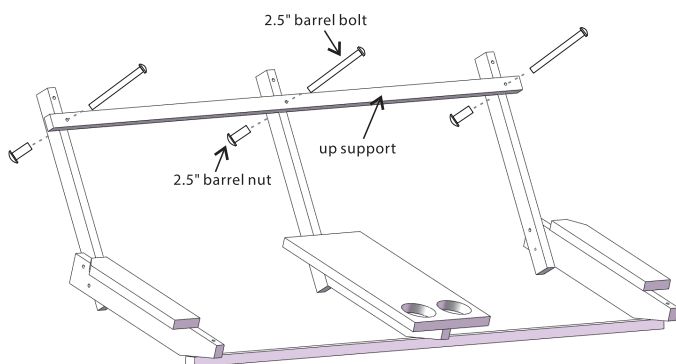

[STEP4]: Use 1.75" hex bolt and washer to attach lower rope seat support to center table support. Tighten all bolts.

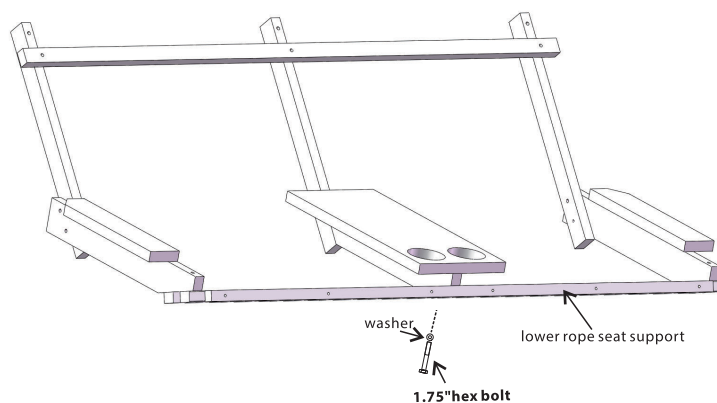

[STEP5]: Use 2.5" barrel bolt and bolt nut to attach upper rope seat outside and middle verticals. Use (2) eye bolts, (4) washers, and (2) nuts to attach shorter end of chain set to upper seat support. Use (2) eye bolts, (4) washers, and (2) nuts to attach longer end of chain set to left and right arms. (Rope not pictured)

